

Quick Release Coupling Double Shut Off (Double Check)





Features

- ▶ Simple Design
- ▶ Steel Plated, Stainless Steel & Brass Materials are available
- ▶ Maintenance free & Long life
- ▶ Standard Seals
- ▶ Design for used in a wide range of applications.

Technical Specification

Model	QR - D
Size	1/8" to 2"
Type	Double Check
Pressure	Refer to Technical Date
Temperature	Upto 85 °C (Upto 250 °C Available On Request)
Leakage	Bubble Tight
Ports	Female to Female
Media	Compressed Air / Water / Oil & Gas

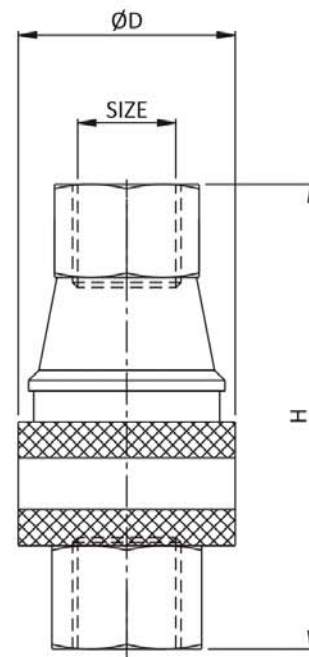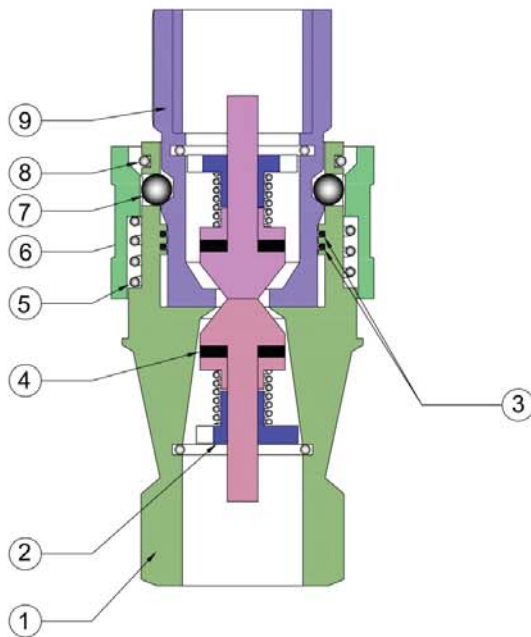

No.	Part Name	Material
1	Socket / Body	M. S. / Brass / S. S. 304 / S. S. 316
2	Lock	S. S.
3	'O' Ring	NBR
4	Rubber Sheet	NBR
5	Spring	S. S.
6	Sleeve	M. S. / Brass / S. S.
7	Ball	S. S.
8	Lock Washer	S. S.
9	Hose / Connector	M. S. / Brass / S. S.

Dimensions : (All Dimensions are in mm)

MODEL	SIZE	H	ØD	Press. PSI	Weight (Kg.) Approx.
QR-D-4	1/8"	60	22	4000	0.075
QR-D-6	1/4"	73	28	4000	0.154
QR-D-10	3/8"	81	35	4000	0.255
QR-D-15	1/2"	92	42	3500	0.447
QR-D-20	3/4"	98	45	3000	0.533
QR-D-25	1"	112	55	2500	0.973
QR-D-40	1.1/2"	123	75	2000	2.000
QR-D-50	2"	128	77	2000	2.850