


Quick Release Coupling Single Shut Off (Single Check)

Features

- ▶ Simple Design
- ▶ Steel Plated, Stainless Steel & Brass Materials are available
- ▶ Maintenance free & Long life
- ▶ Standard Seals
- ▶ Design for used in a wide range of applications.

Technical Specification

Model	QR - S
Size	1/8" to 2"
Type	Single Check
Pressure	Refer to Technical Date
Temperature	Upto 85 °C (Upto 250 °C Available On Request)
Leakage	Bubble Tight
Ports	Male to Hose / Male to Female Female to Female / Male to Male
Media	Compressed Air / Water / Oil & Gas

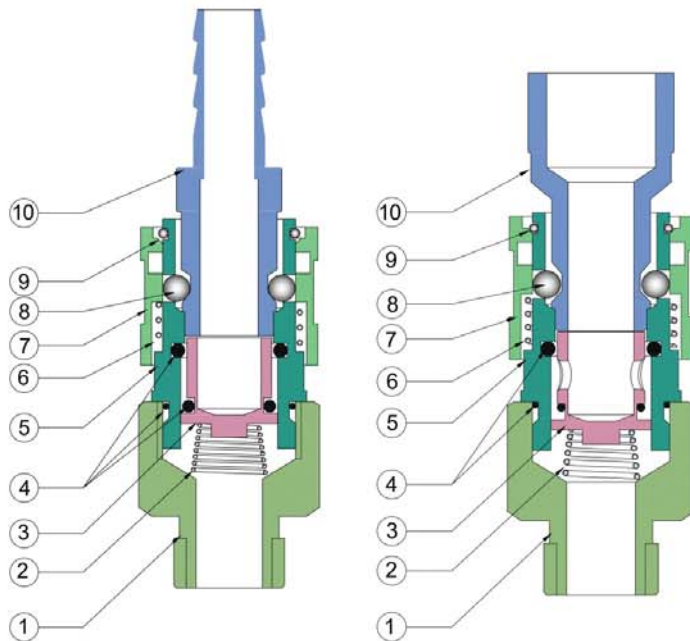

No.	Part Name	Material
1	Socket / Body	M. S. / Brass / S. S.
2	Spring	S. S.
3	Check Valve	Brass / S. S.
4	'O' Ring	NBR
5	Coupler	M. S. / Brass / S. S.
6	Spring	S. S.
7	Sleeve	M. S. / Brass / S. S.
8	Ball	S. S.
9	Lock Washer	S. S. / M. S.
10	Hose / Connector	M. S. / Brass / S. S.

Dimensions :

(All Dimensions are in mm)

MODEL	SIZE	H		N	ØD	Press. PSI	Weight (Kg.) Approx.
		Hose	Female				
QR-S-4	1/8"	70	55	6.5	17	500	0.045
QR-S-6	1/4"	83	70	10	22	500	0.110
QR-S-10	3/8"	84	71	8	2	500	0.100
QR-S-15	1/2"	107	90	13	32	500	0.260
QR-S-20	3/4"	122	104	21	38	500	0.400
QR-S-25	1"	127	107	27	44.5	500	0.550

