


Air Combination (Filter + Regulator)

Features

- ▶ Compact Design & High Flow
- ▶ Piston type Design
- ▶ Comfortable to all industrial used.
- ▶ Easy Installation

Technical Specification

Model	AR-MD-6	AR-MD-10	AR-MD-15
Size	1/4"	3/8"	1/2"
Inlet Pressure	10 Kg/cm ² (max.)		
Outlet Pressure	0 to 8 Kg/cm ² (max.)		
Temperature	50 °C (max.)		
Adjusting Setting	Turn 'T' Type Key Clock wise to increase pressure		
Flow SCFM at 5 BAR	40	65	100
Media	Compressed air		
Weight	0.472	0.471	0.461

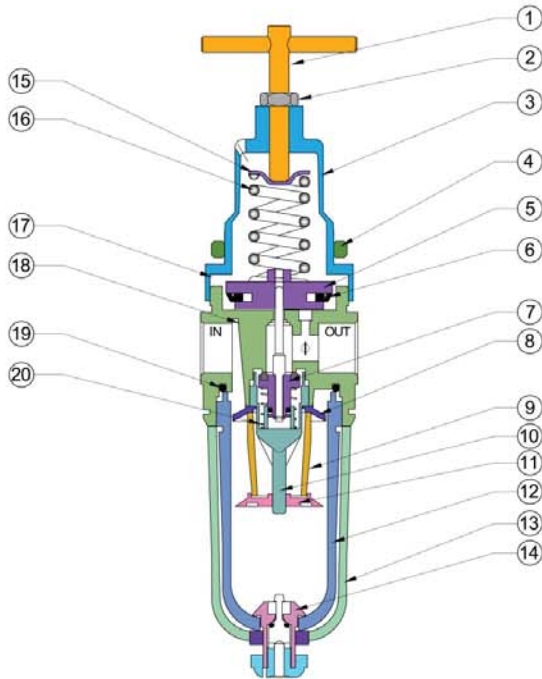

No.	Part Name	Material
1	'T' Type Knob	Steel Plated
2	Check Nut	Brass
3	Bonnet Cover	Aluminum Pressure Die Cast
4	Spring Guide	Steel Plated
5	Spring	Spring Steel
6	Panel Ring	Aluminum / Nylon
7	Piston	Polyacetal
8	Body	Aluminum Pressure Die Cast
9	Plunger with Rubber Moulded	Brass / Aluminum
10	Spring	S. S.
11	Bottom Plug	Nylon
12	'O' Ring	NBR
13	'V' Seal	NBR

